

# JC72403

## Skydisc IP20

Skydisc IP20 22W 4000K 1750Lm

### Features & Benefits

- Polycarbonate construction
- Three sizes available
- Ultra low profile design
- Non-dimmable
- 2 years standard warranty extends to 3 years when registered within the first year of purchase (See Website for terms and conditions)
- This product contains a light source of energy efficiency class G



RATING



WARRANTY



CRI:RA



BEAM



CLASS II

### General Information

Mounting

Environment

Product Group

Product Range

Trade Name

Color Finish

Product Shape

Product Weight(kg)

Light Source

Light Source Features

Additional Information

Luminaire Accessories

Overall Dimensions (mm) Rim

Recommended Product Location

Method Of Fix

Product Aperture Size

IP Rating

Origin of manufacturer

Warranty

**Recessed**

**Indoor**

**LED - Recessed**

**Skydisc IP20**

**Skydisc**

**White**

**Round**

**0.405**

**LED**

**Neutral White**

**Not suitable for use with JCEM001ST**

**Emergency remote pack JCEM001**

**Ø240mm**

**Interior Recessed**

**Spring Clips (supplied)**

**230mm**

**IP20**

**Made In China**

**2 years standard warranty extends to 3 years when registered within the first year of purchase (See Website for terms and conditions)**

Driver Manufacturer	JCC
LED Manufacturer/Type	Runlite
Lighting Product Type 1	Downlight

Electrical

Voltage Rating	220-240
Primary Running Current(Amp)	0.161
Operating Frequency Hz	50/60Hz
Secondary running current(mA)	275
Constant Current or Constant Voltage	CC
Luminaire Circuit Wattage	22
Class	II
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.9
Input Electrical Connections	Live & Neutral
Dimmable	No

Thermals

Insulation Coverage	Do not cover with insulation
---------------------	------------------------------

Performance Data

LED Life (Hours)	30000
------------------	-------

Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

Energy Rating	This product contains a light source of energy efficiency class G
Actual Lumen Output	1750
Lumens Per Circuit Watt	80
Color Rendering Index	80-89
CRI: Ra	80
Correlated Color Temperature	4000K
Beam Angle °	120
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Construction

Primary Material	Polycarbonate
------------------	---------------

Packaging

Product Packaged Weight(kg)	0.52
Quantity Per Outer Carton	40
Product Bar Code EAN-13 Number	5052544080401

## Standards & Approvals

Manufactured In Accordance To

CE Marked

UKCA Marked

Date code/Purchase order No.

WEEE Symbol

Certificate Of Conformity

Accredited Members

**BS EN 60598:2015, 2-1, 2-2**

**Yes**




**Yes**

**Yes**

**Yes**

**Available on request**

**LIA, ISO9001-2015, ISO14001-2015**

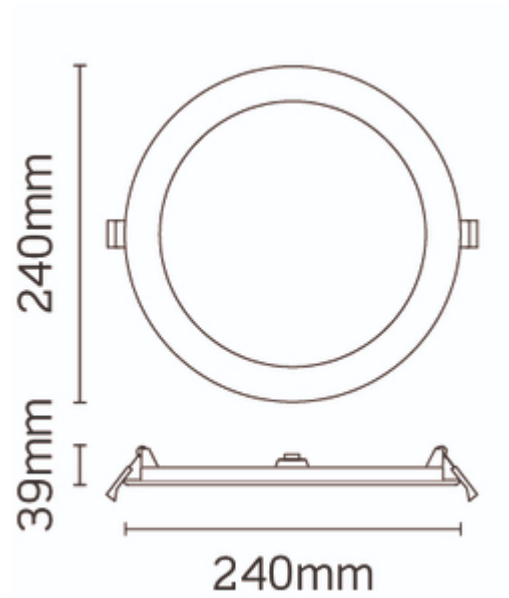

---

JCC Lighting LTD Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex PO22 9TS  
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | [sales@jcc.co.uk](mailto:sales@jcc.co.uk) | [www.jcc.co.uk](http://www.jcc.co.uk)  
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 68 [04/01/2022]